


The Cruise Control



Store .com

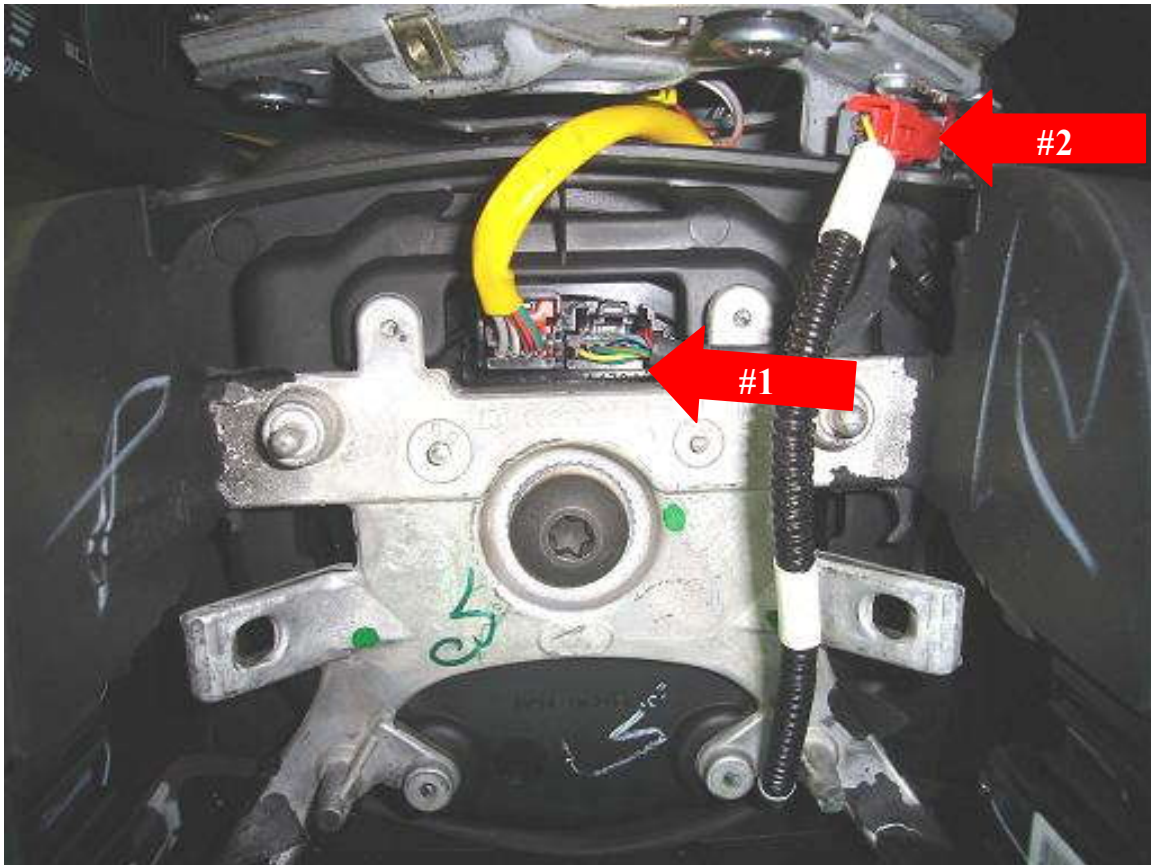

- 1) Remove horn pad / air bag with 2-8mm bolts from rear of wheel (remove round plastic covers to access bolts). Do not disconnect air bag unless you have disconnected battery.
- 2) Disconnect plugs marked #1 and #2 in picture and set aside. These plugs are no longer needed.
- 3) Install new cruise switches and plug into connectors marked #1 and #2.
- 4) Reinstall horn pad / air bag and program vehicles cruise features.