


# The Cruise Control



## Store .com

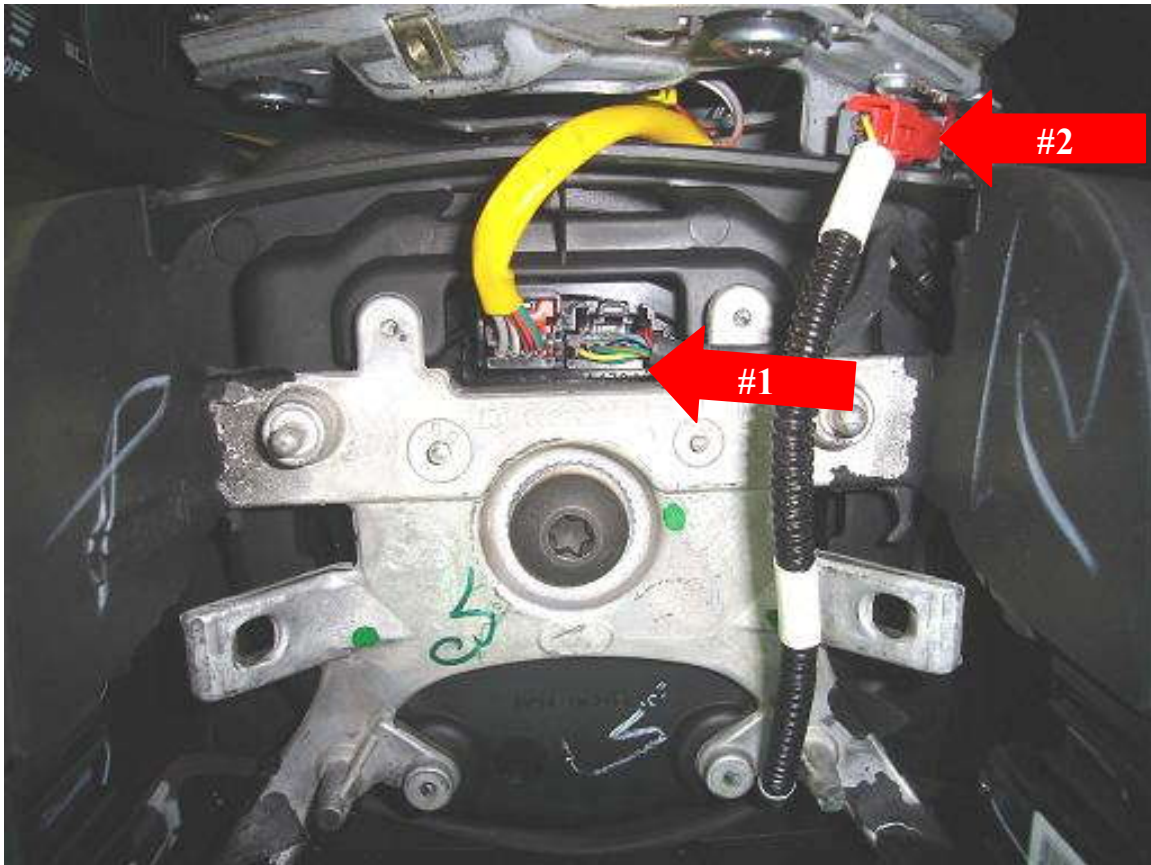

- 1) DISCONNECT NEGATIVE BATTERY TERMINAL !!!!!Remove horn pad / air bag with 2-8mm bolts from rear of wheel (remove round plastic covers to access bolts).
- 2) Disconnect plugs marked #1 and #2 in picture and set aside. These plugs are no longer needed.
- 3) Install new cruise switches and plug into connectors marked #1 and #2.
- 4) Reinstall horn pad / air bag and program vehicles cruise features.